



Ola S

design Paolo Vernier, 2016

Ola chair with four legs base in white or black lacquered steel. Shell available in abs, veneered wood or upholstered with leather, ecoleather, fabric, custom's fabric, hide or regenerated hide.


Ola chair is stackable up to 4 units and in the abs shell version is suitable for the outdoor use.

For an only indoor use we have created the exclusive version "IN" with matt effect.




Finishing and Materials

Structure

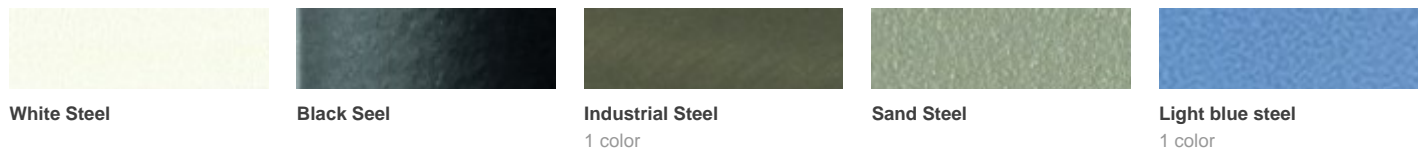

Coating

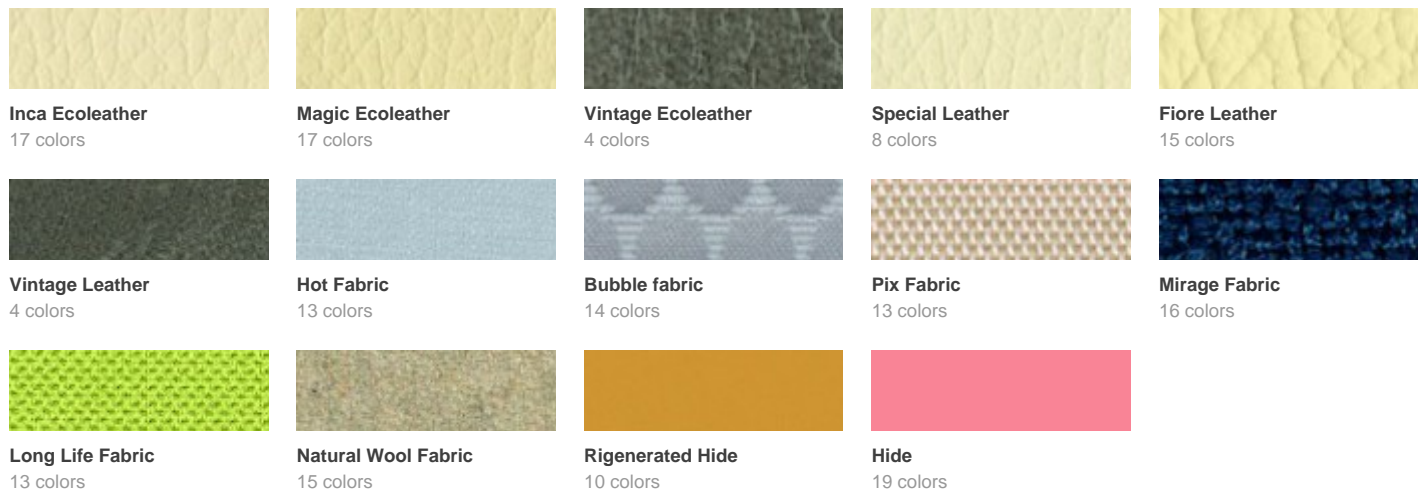

Dimensions



Dimension	cm	inch
A	82	32.3

Dimension	cm	inch
B	50	19.37
C	54	21.3
D	46	18.1

Volumetric Details

Weight 13

Volume 0.29 mc

Package 1

Gallery



Downloads

[Ola catalog \(pdf\)](http://www.midj.com/images/uploads/resources/Midj_2016_catalogo_Ola.pdf) - http://www.midj.com/images/uploads/resources/Midj_2016_catalogo_Ola.pdf

Materials Certifications

Inca Ecoleather

Martindale: 50.000 cycles Composition: 6% Cotton, 6% Polyester, 88% PVC Shrinking about: 1% Fire retardant fabric: Classe 1IM, BS 5852 Part. 1, IMO RES. A.652(16)

Magic Ecoleather

Martindale: 150.000 cycles Composition: 31% Cotton, 48% Polyurethane, 21% Polyester Shrinking about: 1% Fire retardant ecoleather: Classe 1IM, BS 5852 Part. 1, Cigaret Test, Match Test

Vintage Ecoleather

Ecoleather phtalatic free - R.E.A.C.H. 1907/2006/EU Breathable ecoleather Composition: 90% PVC, 7% Polyurethane, 3% Cotton Shrinking about 1%

Fiore Leather

BS 5852 parte 1; ISO 5402>50000 cicli; ISO 105B02 ? 5; ISO 3377-1 ?20 N; ISO 11644 ? 2.5 N/Cm; EN 1021/1-2; EN ISO 17233 -20°; IMO RES A 6528(16)

Vintage Leather	UNI EN ISO 105 B02 ?3; ISO 5402>50000 cicli; ISO 3377-1?20; UNI EN ISO 11640 Secco - Dry 50 c ?4 Umido - Wet 20 c ? 3; Sudore - Sweat 20 c ? 3
Hot Fabric	Martindale: 45.000 cycles Composition: 100% Pes Fire retardant fabric: BS5852:2006 (p. 11 CRIB 5), EN1021-1, EN1021-2, UNI 9175:2010 - classe 1 im
Bubble fabric	Martindale: 35.000 cycles Composition: 100% Pes Fire retardant fabric: BS5852:2006 (p. 11 CRIB 5), EN1021-1, EN1021-2, UNI 9175:2010 - classe 1 im
Mirage Fabric	Mantindale: 100.000 cycles Composition: 100% Polyester Shrinking about 1% Fire retardant fabric: classe 1IM, B1 DIN 4102, M1, B1 OENORM Part.1, BS 5852 Crib 5, EN 1021, USA Calif. Bull 117, IMO 688 (17) - IMO 563 (14) - IMO 653 (16)
Long Life Fabric	Martindale 40.000 cycles Composition: 74% Polyester, 18% Cotton, 8% Acrylic Shrinking about 1%
Natural Wool Fabric	Martindale: 100.000 cycles Composition: 70% Wool, 25% Polyamid, 5% Fibers Shrinking about: 1% Fire retardant fabric: BS 5852 part. 1, Cigaret test, Match test